


PP-7 Peristaltic Pump (3 Rollers)


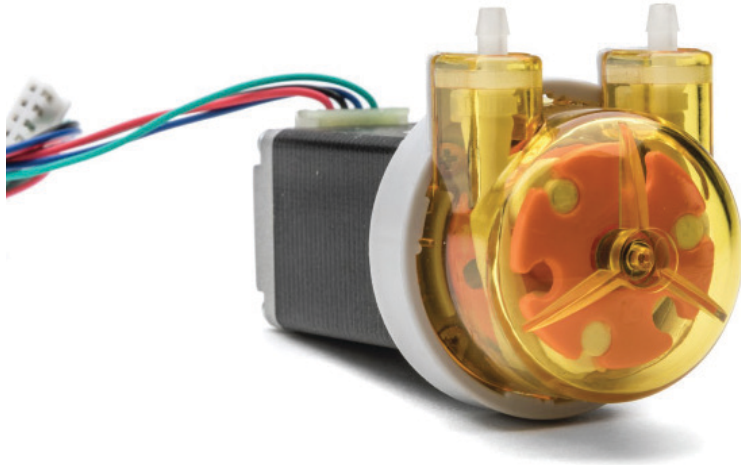


FEATURES

- ✓ Flow Rate: up to 72 mL/min
- ✓ Stepper Motor allows for quiet operation and is more precise than DC Motor
- ✓ Tubing Options: PharMed® BPT (BPT), Silicone (S)
- ✓ Max Motor Speed: 250 rpm
- ✓ 3 Rollers

WIRING INSTRUCTIONS: (2 Options)

Phase A	Brown A+	Phase A	Black A+
	Orange A-		Green A-
Phase B	Red B+	Phase B	Red B+
	Yellow B-		Blue B-

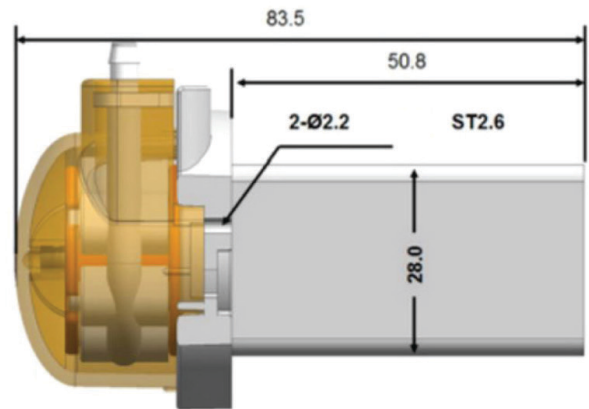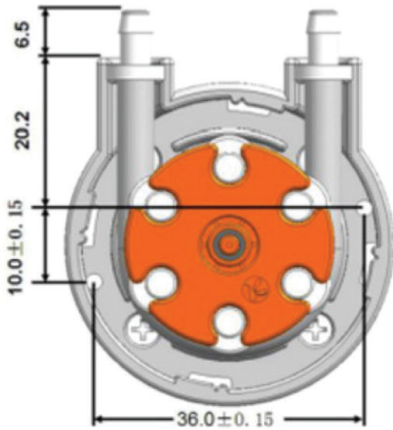

PP-7	Flow Rate (mL/min)					
12 VDC Stepper - 3 Rollers	12	27	45	72	12	25
24 VDC Stepper - 3 Rollers	12	27	45	72	12	25
Tubing Options						
Tubing Material	S	S / BPT	S / BPT	S	BPT	BPT
Tubing Size IDxOD (mm)	1x3	2x4	2.5x4.5	3x5	1x3.2	1.5x3.5